

# PolySign® Single Panel Series Non-Illuminated Fiberglass




**4130.1**  
Single Post Mount

Customer : \_\_\_\_\_ Customer Order No. : \_\_\_\_\_

Project Name : \_\_\_\_\_ **APCO Order No.** : \_\_\_\_\_

Sign Type/Location No.: \_\_\_\_\_

Prepared by : (Print clearly) \_\_\_\_\_ Date : \_\_\_\_\_

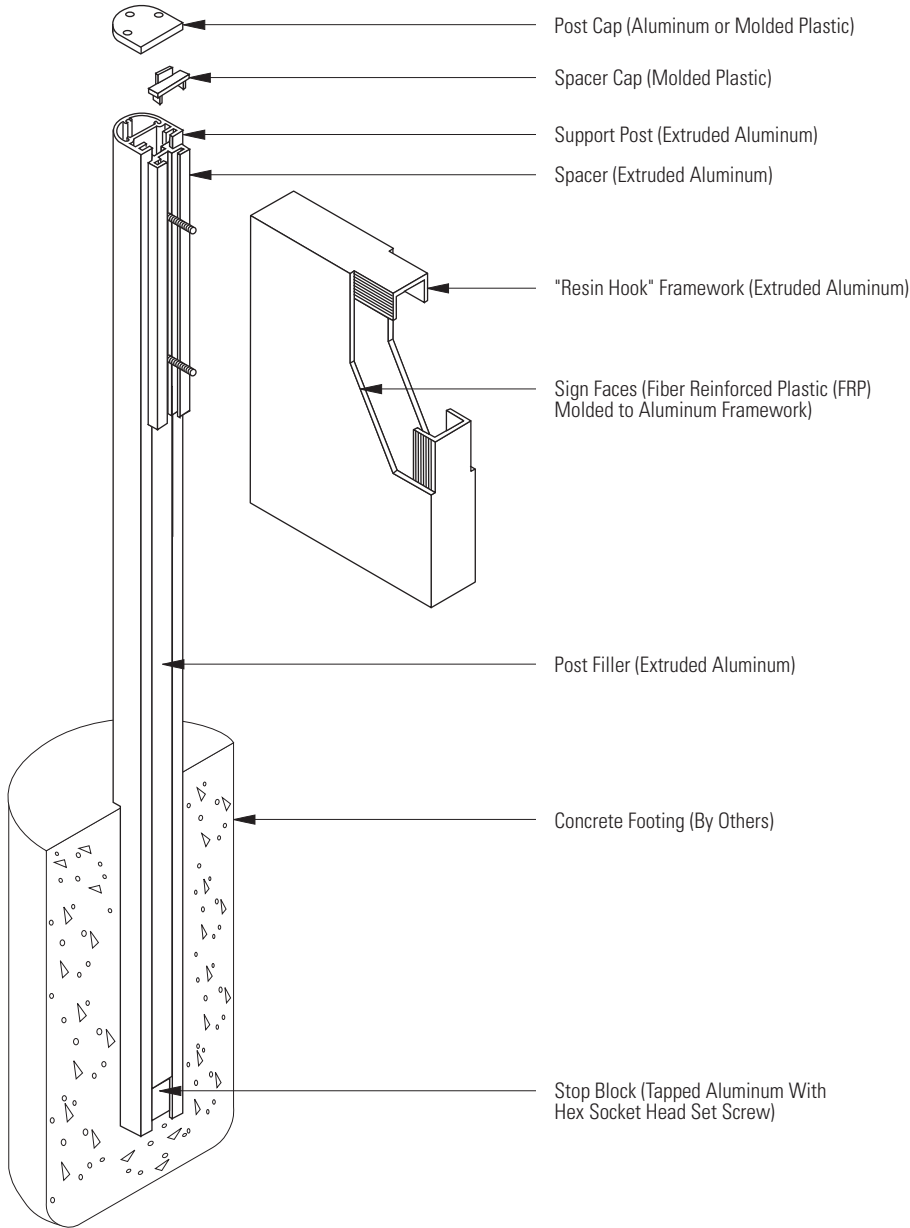

**Partial Exploded View**

# PolySign® Single Panel Series Non-Illuminated Fiberglass



**4130.1**  
Single Post Mount

## Sign Panel

Size: H. \_\_\_\_\_ W. \_\_\_\_\_ D. 2"

Background Color: \_\_\_\_\_

NOTE: Refer to Layout Drawing(s) for graphic layout and specifications.

## Reveal Finish

315 Black Anodized (Standard)

## Post Shape

Radius 50mm



Square 50mm



Contour 50mm



## Post Finish

313 Dark Bronze Anodized

315 Black Anodized

Natural Satin Anodized

Other: \_\_\_\_\_

## Mounting Method

In-Ground (Standard)

Above Grade with Welded Aluminum Plate (Anodized Finish Not Recommended)

Above Grade Anchor Bolt Qty.: 4

Anchors Provided By Others

Anchors by APCO

## Special Comments

---



---



---



---



---




---





---

### In-Ground Installation (Standard)

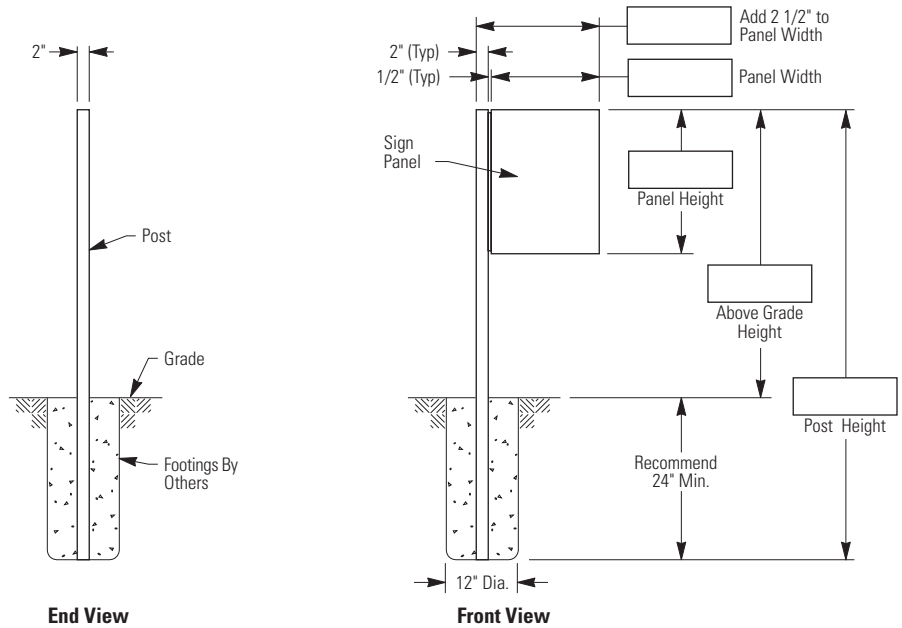

### Above Grade Installation (Optional)

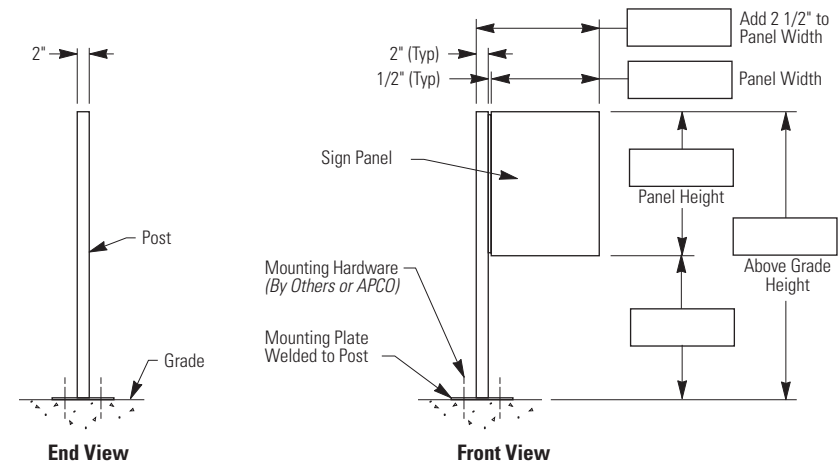

**Welded Mounting Plate**  
(Square 50mm Post Shown)  
Mounting pattern available upon request.

## NOTES:

Footing design to be specified by qualified person(s) based on local codes and geographical practices such as frost lines, soil conditions, etc.

Anchor bolts to be specified by qualified person(s) and installed per manufacturer's recommendations.