

# PolySign® Single Panel Series Non-Illuminated Fiberglass




**4160.1**  
Flat Sheet Post Mount

Customer : \_\_\_\_\_ Customer Order No. : \_\_\_\_\_

Project Name : \_\_\_\_\_ **APCO Order No.** : \_\_\_\_\_

Sign Type/Location No.: \_\_\_\_\_

Prepared by : (Print clearly) \_\_\_\_\_ Date : \_\_\_\_\_

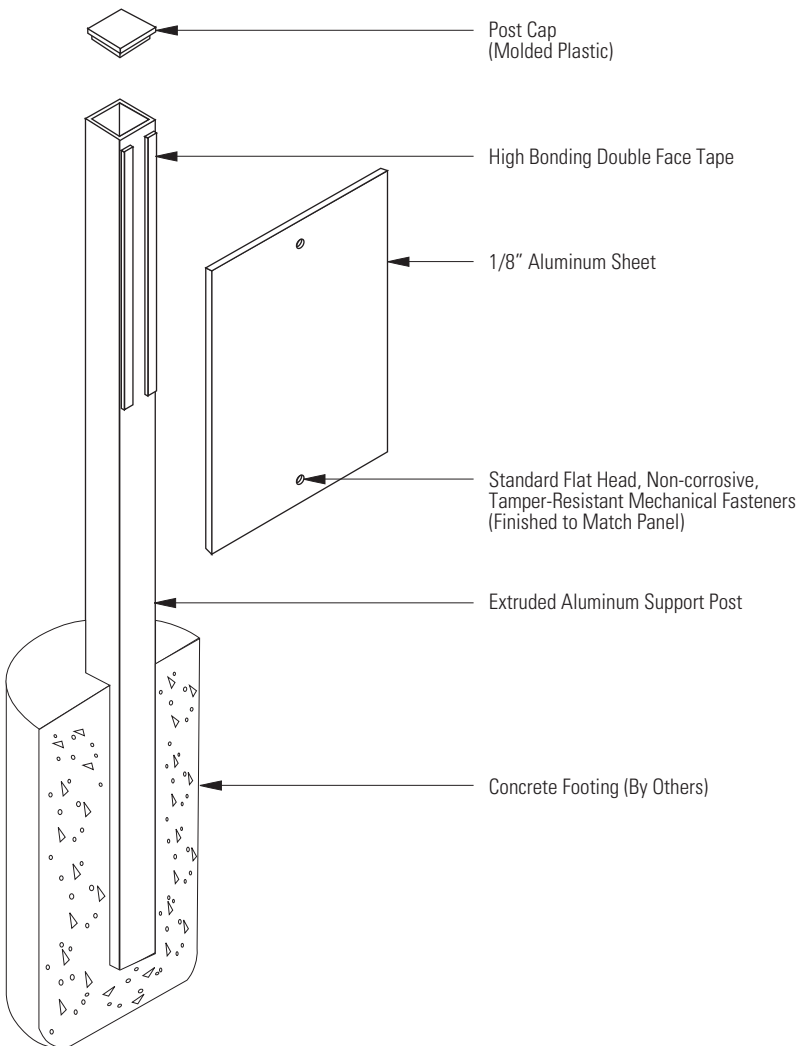

**Partial Exploded View**

# PolySign® Single Panel Series

## Non-Illuminated Fiberglass



**4160.1**  
Flat Sheet Post Mount

### Sign Panel

Size: H. \_\_\_\_\_ W. \_\_\_\_\_ D. 1/8"

Background Color: \_\_\_\_\_

NOTE: Refer to Layout Drawing(s) for graphic layout and specifications.

### Panel Corner Shape

- Square (Standard)
- 1" Radius
- 2" Radius
- 3" Radius

### Panel Attachment Method

- Two Flat Head Countersunk Screws with High Bonding Double Faced Tape (Standard)

### Post Shape

- Square 50mm (Standard)
- Radius 50mm
- Contour 50mm



### Post Finish

- 313 Dark Bronze Anodized
- 315 Black Anodized
- Natural Satin Anodized
- Other: \_\_\_\_\_

### Mounting Method

- In-Ground (Standard)
- Above Grade with Welded Aluminum Plate (Anodized Finish Not Recommended)

Above Grade Anchor Bolt Qty.: \_\_\_\_\_ 4

- Anchors Provided By Others
- Anchors by APCO

### Special Comments

---



---



---




---


#### NOTES:

Footing design to be specified by qualified person(s) based on local codes and geographical practices such as frost lines, soil conditions, etc.  
Anchor bolts to be specified by qualified person(s) and installed per manufacturer's recommendations.

### In-Ground Installation (Standard)

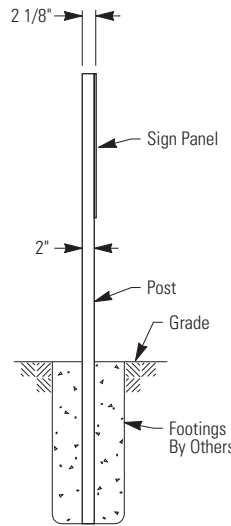


End View

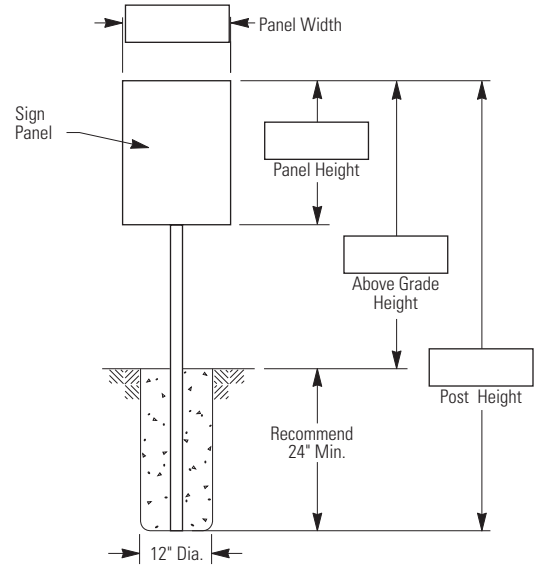


Front View


### Above Grade Installation (Optional)

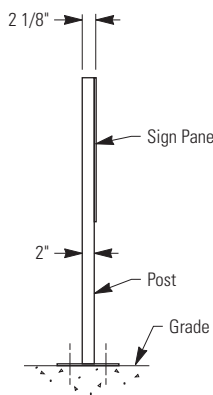


End View

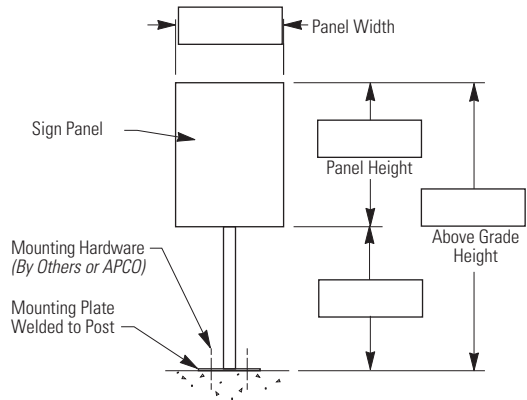

Front View



**Welded Mounting Plate**  
(Square 50mm Post Shown)  
Mounting pattern available upon request.



**Sign Panel Corner Options**