

FullView®

FS300 & FS301 - Free Standing Series

Assembly Instructions

The Single Post Pedestal accommodates displays at a 60 degree incline (FS300) or vertical (FS301 & 301.2)

Post Assembly

Remove Posts and Sign Assembly from carton, set aside. Remove Base Plate which is located under the cardboard pad in the bottom of the carton.


Locate the post with the exposed threaded stud (A). Apply a small amount of thread locker to the end of the stud and thread into either end of the second

Base Assembly


Apply thread locker to the bottom bolt (C) and attach Base as shown.

Sign Assembly Attachment

Apply thread locker to remaining bolt (C) and attach Sign Assembly as shown.

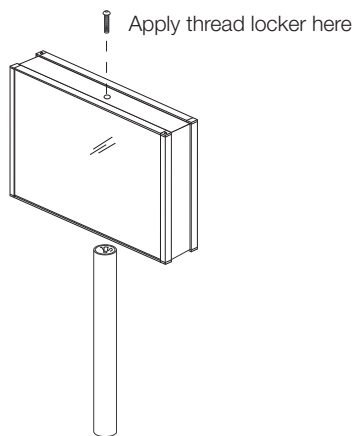

FS301.2 Two sided vertical

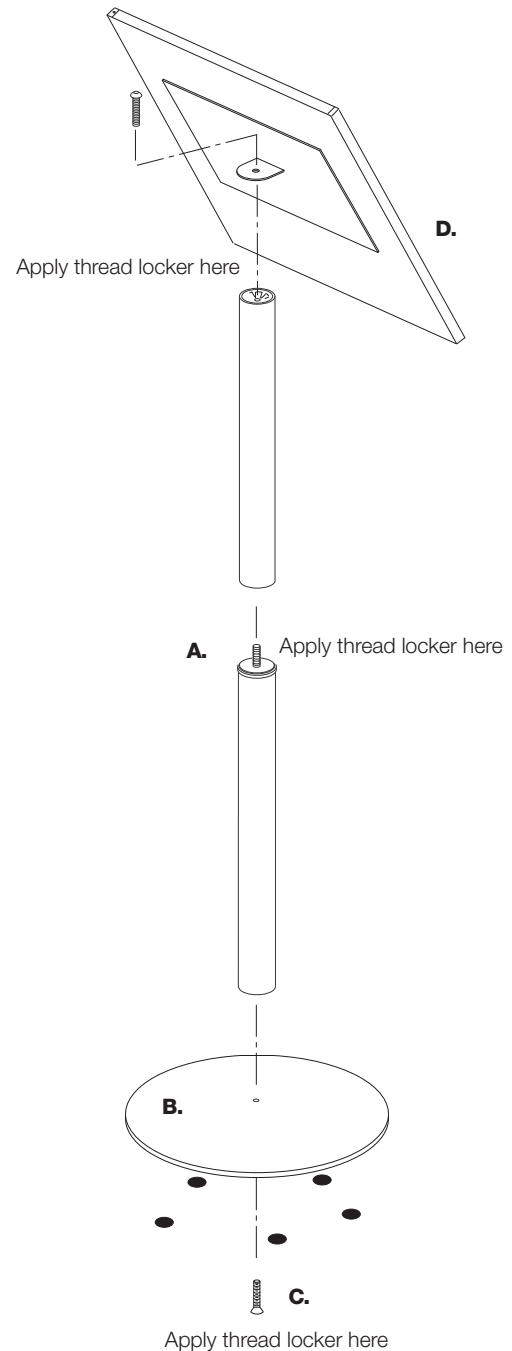

| Description | QTY/Assy |
|------------------|----------|
| A. Post Assembly | (1) |
| B. Base Plate | (1) |
| C. Fasteners | (2) |
| D. Sign Assembly | (1) |
| E. Locking Pins | (2) |




1/4-20 x 1" Flat HD Socket - SS Machine Screw for Base attachment



5/32" Hex Wrench



1/4-20 x 1" Pan HD Socket - SS Machine Screw for Sign Holder attachment



Magnetic Locking Pin Removal tool



Locking Pin



.5 ml medium strength thread locker